

## 8 - 2016 JR GOLD - WOODLAND




Oil Pattern Distance	36	Reverse Brush Drop	28	Oil Per Board	50 ul
Forward Oil Total	22.2 mL	Reverse Oil Total	4.45 mL	Volume Oil Total	26.65 mL
Tank Configuration	N/A	Tank A Conditioner	FIRE	Tank B Conditioner	FIRE

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	4	14	3	Α	148	0.0	5.9	5.9	7400
2	3L	3R	1	18	3	Α	35	5.9	8.4	2.5	1750
3	4L	4R	3	18	3	Α	99	8.4	16.0	7.6	4950
4	6L	6R	3	18	3	Α	87	16.0	23.6	7.6	4350
5	8L	8R	3	18	3	Α	75	23.6	31.2	7.6	3750
6	2L	2R	0	26	3	Α	0	31.2	36.0	4.8	0

	START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	3	В	0	36.0	14.0	-22.0	0
2	6L	6R	2	18	3	В	58	14.0	8.9	-5.1	2900
3	5L	5R	1	14	3	В	31	8.9	7.0	-1.9	1550
4	2L	2R	0	10	3	В	0	7.0	0.0	-7.0	0

Cleaner Ratio Main Mix 5:1
Cleaner Ratio Back End Mix 5:1
Cleaner Ratio Back End Distance 59
Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50

Forward Reverse Combined

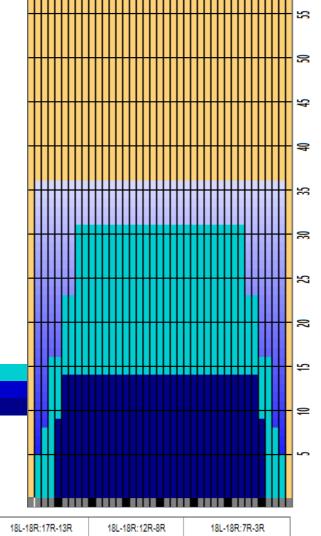

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R	
Description Outside Track:Midd		Middle Track:Middle Inside Track:Middle		MIddle: Inside Track	Middle:Middle Track	Middle:Outside Track	
Track Zone Ratio	1.7	1	1	1	1	1.7	
1500 — 1350 — 1200 — 1050 —							

