


Oil Pattern Distance	37	Reverse Brush Drop	33	Oil Per Board	40 ul
Forward Oil Total	15.76 mL	Reverse Oil Total	9.64 mL	Volume Oil Total	25.4 mL
Tank Configuration	N/A	Tank A Conditioner	Terrain	Tank B Conditioner	Current

	START	STOP	LOADS	MICS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	3	40	14	3	B	111	0.0	3.9	3.9	4440
2	5L	5R	1	40	14	3	B	31	3.9	5.8	1.9	1240
3	6L	6R	2	40	14	3	B	58	5.8	9.7	3.9	2320
4	8L	7R	2	40	14	3	B	52	9.7	13.6	3.9	2080
5	9L	8R	1	40	14	3	B	24	13.6	15.5	1.9	960
6	10L	9R	2	40	14	3	B	44	15.5	19.4	3.9	1760
7	11L	10R	2	40	14	3	B	40	19.4	23.3	3.9	1600
8	12L	11R	1	40	18	3	B	18	23.3	25.8	2.5	720
9	13L	12R	1	40	18	3	B	16	25.8	28.3	2.5	640
10	2L	2R	0	40	18	3	B	0	28.3	32.0	3.7	0
11	2L	2R	0	40	22	3	B	0	32.0	37.0	5.0	0

	START	STOP	LOADS	MICS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	40	30	3	B	0	37.0	32.0	-5.0	0
2	11L	10R	1	40	22	3	B	20	32.0	28.9	-3.1	800
3	10L	9R	1	40	22	3	B	22	28.9	25.8	-3.1	880
4	9L	8R	2	40	22	3	B	48	25.8	19.6	-6.2	1920
5	7L	7R	2	40	22	3	B	54	19.6	13.4	-6.2	2160
6	6L	6R	1	40	14	3	B	29	13.4	11.5	-1.9	1160
7	5L	5R	1	40	14	3	B	31	11.5	9.6	-1.9	1240
8	2L	2R	1	40	14	3	B	37	9.6	7.7	-1.9	1480
9	2L	2R	0	40	14	3	B	0	7.7	0.0	-7.7	0

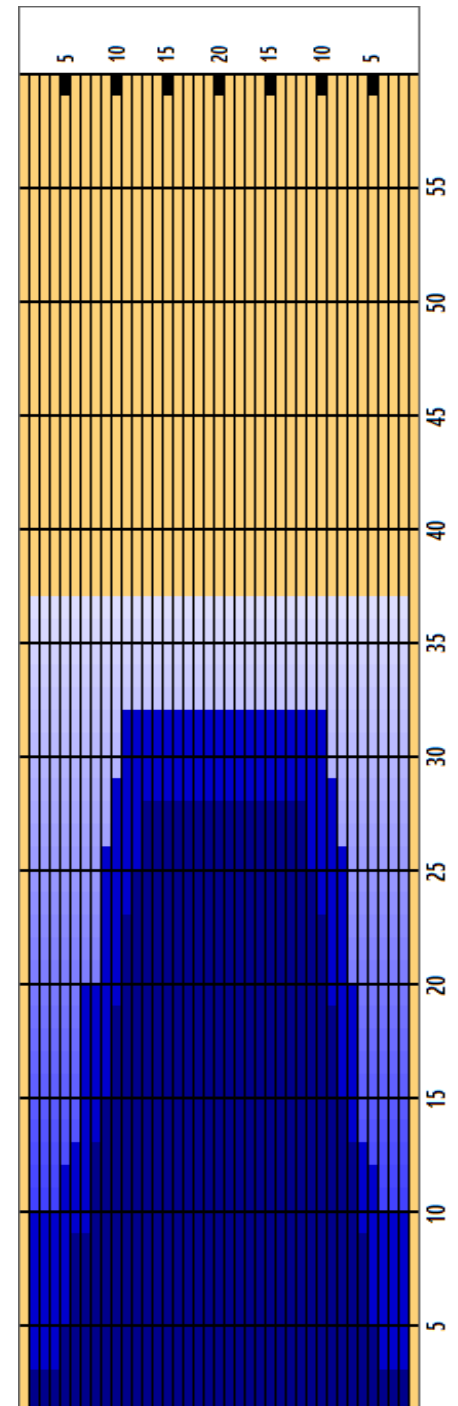

Cleaner Ratio Main Mix: NA Forward  
 Cleaner Ratio Back End Mix: NA Reverse  
 Cleaner Ratio Back End Distance: NA Combined  
 Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	3.53	1.29	1	1	1.15	3.33

